

**ROCOL®**



## SITE SAFETY & ANTI-SLIP SOLUTIONS

Superior Performance Products and Solution that make our living and working environments safer.

Performance you can trust



# HISTORY OF EXCELLENCE

At ROCOL® we manufacture a range of innovative greases, oils, metalworking fluids, lubricants, aerosol paints, anti-slip floor coatings and panels - all designed to exceed today's challenging operating conditions.



Over the last 130 years, we have expanded considerably and offer solutions to nearly every facet of industry with over 150 distributors stocking and supplying the product range worldwide.

ROCOL have worked with some of the world's leading companies in many diverse industries and applications, developing products with one common goal: to deliver optimum performance.

We pride ourselves on producing technically advanced products with industry needs at the core. Each and every product has been developed in the spirit ROCOL are renowned for:

- ▶ Trusted Superior Performance
- ▶ Problem Solving
- ▶ High Quality
- ▶ Technical Innovation
- ▶ Excellent Technical and After-Sales Support

ROCOL operate to internationally recognised standards for quality, environment and safety. Also, we are proud of our Investor in People accreditation which demonstrates our commitment to the continual engagement and development of our people.



## QUALITY



## ENVIRONMENT



## SAFETY



## PEOPLE





Since the launch of the first EASYLINE® Aerosol line marking system on Tomorrow's World by Raymond Baxter in 1976, Rocol® Site Safety & Anti-Slip Solutions have been at the forefront of innovation; delivering technically superior products to the market.

Our mission is to develop superior performance products and solutions that make our living and working environments safer. From demarcation of pedestrian and vehicular areas to traffic management, from pollution preventing absorbents to slip prevention on bridges and in public areas, our products are found all over the world and across every industry.

## CONTENTS

- ▶ MARKING
- ▶ STENCILS & DEMARCATION
- ▶ SLIP PREVENTION
- ▶ SAFE STEP® FLOOR COATINGS
- ▶ SAFE STEP® REPAIR & PREVENTION
- ▶ TRAFFIC MANAGEMENT



# ROCOL® PAINT





ROCOL offer a complete range of Line and Spot & Survey marking solutions for different applications.

What is the difference between Line Marking and Spot & Survey Marking paints?

	DOWNTIME	COVERAGE	DURABILITY	DRYING TIME
<b>LINE MARKING</b>				
EASYLINE® EDGE	1 HOUR	UP TO 100M	UP TO 3 YEARS	TOUCH DRY - 10 MINS SURFACE - 30 MINS THROUGH DRY - 70MINS HARD DRY - 4 HOURS VEHICULAR TRAFFIC - OVERNIGHT
<b>SPOT MARKING</b>				
CONTRACTOR®			UP TO 6 MONTHS	5 MINS
CONTRACTOR® FUSION			3-6 MONTHS	5 MINS
TEMPORARY FUSION			2-3 MONTHS	5 MINS

Line and Spot & Survey Marking can help to reduce the risk of transport related injuries or fatalities in the workplace.

## PERMANENT LINE MARKING USAGE

-  Internal & External Walkways
-  Zebra Crossing
-  Full Colour Pallet Marshalling Lanes
-  Hatched Boxes and Areas
-  Material Handling Equipment Parking
-  Pallet Grid Lanes
-  Racking Drive-Through Hatches
-  Car Parking Bays

## SEMI-PERMANENT SPOT & SURVEY MARKING USAGE

-  Colour/Hazar coding for Cables & Utilities
-  Mark Sports Routes
-  Construction Sites
-  Ground Maintenance
-  School Sports Days
-  Traffic Accidents
-  Excavations Sites
-  Resurfing Level Indicators
-  Trenchmarking
-  Trees/Grass Marking
-  Survey Marking
-  Highway Maintenance Areas

**DID YOU KNOW?**  
Current European legislation (The European Directive 92/58/eec) requires property owners to provide clear demarcation lines for factory floors showing pedestrian aisles and gangways.



# EASYLINE® EDGE SYSTEM

The world's leading aerosol line marking paint.



Part Code 47010

## FEATURES AND BENEFITS

- ▶ Produces 3 line widths: 50mm, 75mm & 100mm
- ▶ Line-mark close to walls and racking systems
- ▶ For internal and external use
- ▶ Quick and easy to use
- ▶ Heavy-duty storage case
- ▶ Clean, sharp lines

## EASYLINE HAND-HELD APPLICATOR

- ▶ Hand-held applicator used for free-hand marking and stencilling
- ▶ This system gives the user added comfort and ease of use



Part Code 46013

## SUPPLIED IN HEAVY DUTY CASE



“ I WAS PLEASED WITH EASYLINE’S SPEED OF APPLICATION, THE MINIMUM DOWNTIME, AND ESPECIALLY AT HOW BRIGHT AND SHARP THE LINES CAME OUT.”

DAVID REEMAN, PREMISES MANAGER, BEKO PLC



SCAN TO WATCH THE VIDEO OR GO TO:  
[www.rocol.com/easyline](http://www.rocol.com/easyline)

# EASYLINE® EDGE AEROSOL PAINT

EASYLINE Edge line marking paint is accepted as the ultimate line marking paint aerosol around the world. With a superior paint formulation combined with the precision engineered EASYLINE Edge applicator

Paint lasts at least 2 times longer than the best competitor.

## DURABILITY ASTM D4060-84



**EASYLINE**  
AFTER 3800  
CYCLES OF ABRASION



**COMPETITOR A**  
AFTER 1500  
CYCLES OF ABRASION




**COMPETITOR B**  
AFTER 1400  
CYCLES OF ABRASION

Maintains its bright colour longer than other competitors

## COLOUR STABILITY



**EASYLINE**  
UV STABILITY  
AFTER 2000 HRS



**COMPETITOR A**  
UV STABILITY  
AFTER 2000 HRS



**COMPETITOR B**  
UV STABILITY  
AFTER 2000 HRS

Professional Quality Lines

## CRISP, CLEAN LINES



**EASYLINE**



**COMPETITOR A**



**COMPETITOR B**

## FEATURES AND BENEFITS


Lowest Volatile Organic Compounds (VOC's) system on the market.

Dries in 10min, easy to apply, no mess, no wastage.

Complies with your legal obligations under The European Directive 92/58/EEC


Aerosol's are up to 50% stronger, each can is rated at 18 Bar min

## GREATER SURFACE BONDING THAN THE COMPETITION

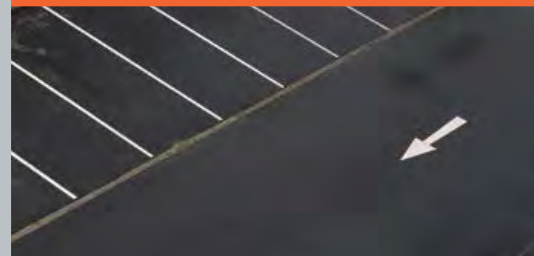

**CROSS HATCH ADHESION**  
BS39000; PART 6; 1974

## HARD WEARING AND OFFERS GREAT FLEXIBILITY, EXCELLENT CONICAL MANDREL

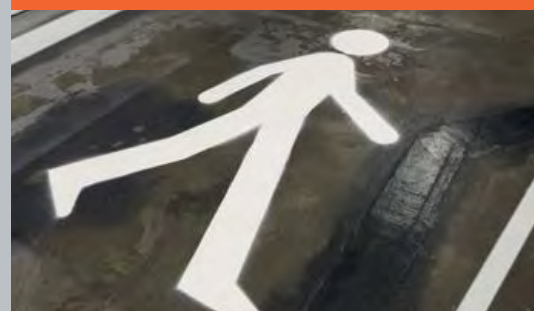


**DURABILITY ASTM D4060-84**






“ EASYLINE CREATES EXCEPTIONALLY CRISP, CLEAR RESULTS AND LASTS FOR AGES - IT’S EVEN BETTER THAN THERMOPLASTIC. THE PAINT AND EQUIPMENT IS STATE-OF-THE-ART, AND A REAL ASSET TO MY COMPANY. I HOLD IT IN THE HIGHEST REGARD.”

**JOHN NGAU, DIRECTOR,  
LITTER CLEAN SOLUTIONS**

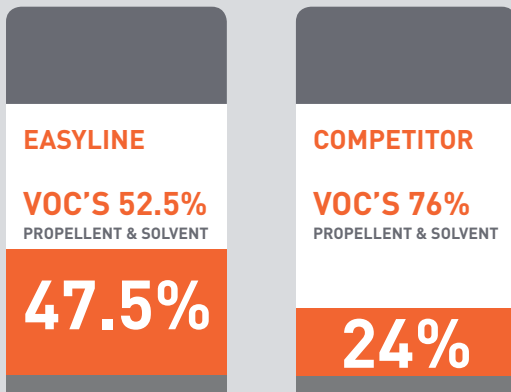**Highest paint content per can on the market**



**Health, Safety and Environment Focused**

EASYLINE	NON IRRITANT	NOT HARMFUL TO THE ENVIRONMENT
COMPETITOR A	HARMFUL 	
COMPETITOR B	IRRITANT 	HARMFUL TO THE ENVIRONMENT

COLOURS	PRODUCT	CODE
RAL 9016	EASYLINE PAINT WHITE 	47000
RAL 1023	EASYLINE PAINT YELLOW 	47001
RAL 3020	EASYLINE PAINT RED 	47002
RAL 5017	EASYLINE PAINT BLUE 	47003
RAL 6024	EASYLINE PAINT GREEN 	47004
RAL 2009	EASYLINE PAINT ORANGE 	47005
RAL 9017	EASYLINE PAINT BLACK 	47006
RAL 7045	EASYLINE PAINT GREY 	47007
-	EASYLINE PAINT FLUORESCENT PINK 	47008
-	EASYLINE PAINT FLUORESCENT YELLOW 	47009

## ROCOL EASYLINE® CAR PARK KIT

A simple and cost effective solution  
for all site marking requirements

### Features and Benefits

- ▶ A simple & cost effective solution to line marking car parks.
- ▶ An excellent alternative to expensive thermoplastic.
- ▶ Line marking which can cost up to £150 for 50m.
- ▶ High durability paint reduces need for re-painting.
- ▶ No need for contractors.

“THE EASYLINE SYSTEM WAS ABSOLUTELY BRILLIANT THE APPLICATOR WAS EASY TO USE AND SAVED A LOT OF TIME AND HASSLE. I WAS IMPRESSED WITH THE PERFORMANCE OF THE PAINT AS WELL. I NEVER EXPECTED IT TO LAST AS LONG AS IT DID - MUCH LONGER THAN OTHER AEROSOL PAINTS WE’VE USED.”

**MICK MAGSON, YARD MANAGER,  
MARSHALLS PLC.**








### EASYLINE CAR PAR KIT CONTENTS:

1x EASYLINE Edge Applicator


6x EASYLINE Edge white aerosol paint

- ▶ Letters x26 (300mm height)
- ▶ Numbers x10 (300mm height)
- ▶ 1x Straight arrow (straight on) (650mm x 1100mm)
- ▶ 2x Turning arrow (left/right) (650mm x 1100mm)
- ▶ 1x Double headed arrow (650mm x 1100mm)
- ▶ 1x Walking man (650mm x 1100mm)
- ▶ Two part disabled emblem

### EASYLINE EDGE STENCILS

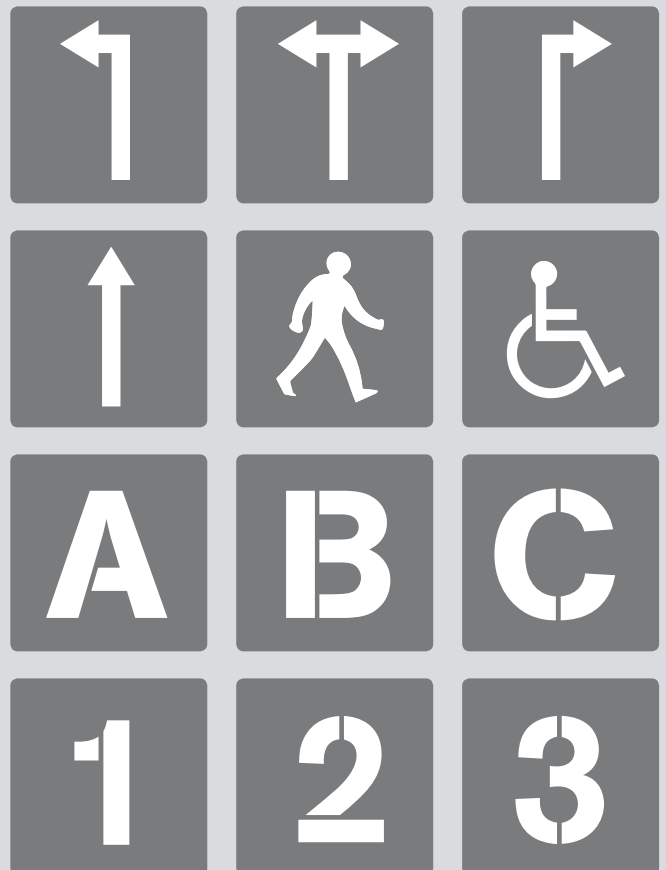

- ▶ Hardwearing polyurethane stencils for premium marking.
- ▶ Letters & numbers contained in professional carry case.
- ▶ Straight arrow, turning arrows, double headed arrow, walking man and disabled stencil all packaged together for easy transport.

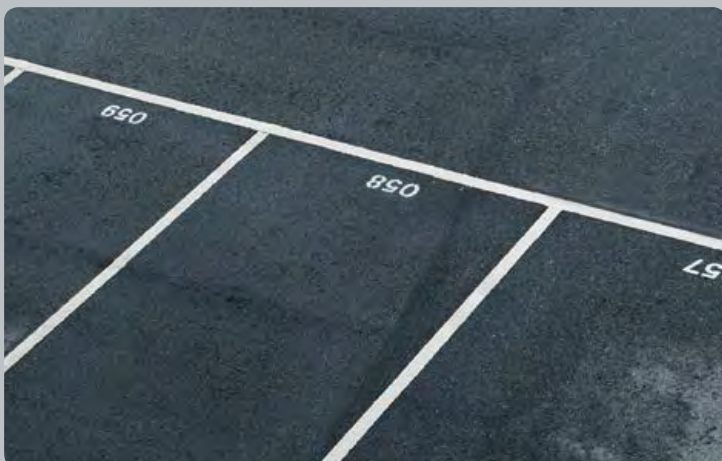

# EASYLINE® GUIDANCE FOR USE

## PREPARING THE SURFACE

Any surfaces covered in heavy grime or grease should be cleaned with a heavy duty cleaner, thoroughly washed down with water after use and allowed to dry.

### PREPARATION

- ▶ Clean surface
- ▶ Needs to be dry
- ▶ Needs to be dust and debris-free

### STEEL

- ▶ Clean surface
- ▶ If possible, abrade the surface
- ▶ Needs to be dry
- ▶ Needs to be dust and debris-free

### CONCRETE

- ▶ Clean surface
- ▶ Use an acid etch solution on new or smooth concrete

### ASPHALT

- ▶ Clean surface
- ▶ Needs to be dry
- ▶ Needs to be dust and debris-free

### NEW TARMAK

- ▶ Clean surface
- ▶ Needs to be dry
- ▶ Needs to be dust and debris-free
- ▶ Paint first line quickly as a sealer
- ▶ When paint has dried, re-apply over top of line

“ WE LOVE THE SAFE PAINT AND EASY-TO-USE APPLICATOR; THE KIDS LOVE THE PLAYGROUND'S FRESH, VIBRANT COLOURS. WE'LL BE USING EASYLINE AGAIN”

**FULHAM PRIMARY SCHOOL**

### DID YOU KNOW?


EASYLINE EDGE PAINT is resistant to most general chemicals for example:

- ▶ **Detergents**
- ▶ **Petrol**
- ▶ **Diesel**
- ▶ **Oil**




FOR EVERY CAR PARK, PLAYGROUND, WAREHOUSE AND SPORTS FIELD, THERE'S AN EASYLINE SOLUTION.


**SPORTS PITCHES AND COURTS**

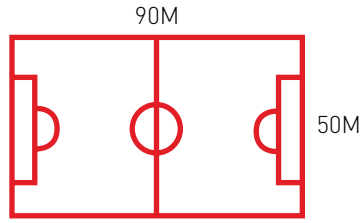


ASSOCIATION FOOTBALL JUNIOR: 5 CANS




VOLLEYBALL: 1 CAN

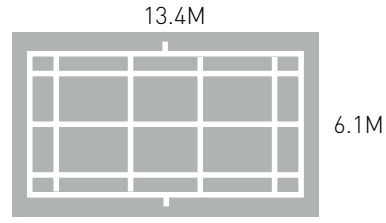


BADMINTON: 2 CANS



TENNIS: 2 CANS

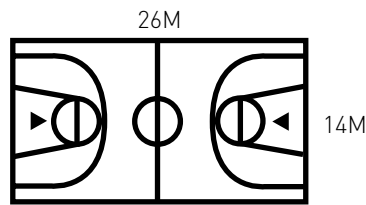


BASKETBALL: 2 CANS

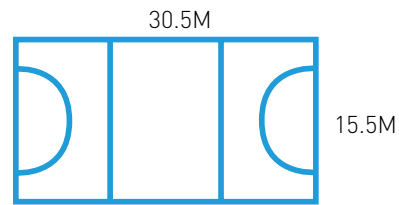


NETBALL: 2 CANS


**CARPARKING:**

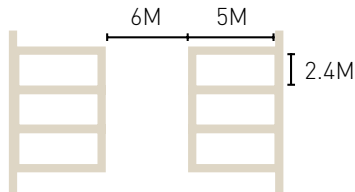

**RIGHT ANGLE PARKING**




**45° PARKING**



**KERB SIDE PARKING**

Note: These designs are for guidance only. Refer to relevant association guidelines for full specifications.

**LEGISLATION - WALKWAYS / FORK LIFTS**

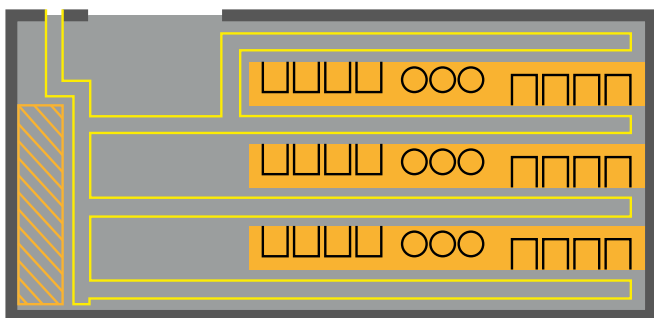

SUGGESTED LAYOUTS FOR:



Chemical Storage




Walkway



Racking



600mm




1.4m

Clear width for people

**FACILITIES MANAGEMENT**

Suggested layout for Two Person Walkway



1.4m

Suggested layout for One Person Walkway



600mm

## SPOT AND SURVEY MARKING

ROCOL® offer a comprehensive range of Spot and Survey marking solutions to a wide variety of markets.

At ROCOL we manufacture three ranges of Spot and Survey marking solutions: CONTRACTOR, CONTRACTOR FUSION, and TEMPORARY FUSION.



### SPOT & SURVEY MARKING SELECTOR GUIDE

PRODUCT	INDOOR	OUTDOOR	DRYING TIME	DURABILITY	UNIT SIZE	PACK SIZE	COLOURS
CONTRACTOR®	✓	✓	5 mins	Up to 6 months	750ml	12	6
CONTRACTOR® FUSION	✓	✓	5 mins	3 - 6 months	750ml	6	6
TEMPORARY® FUSION	✓	✓	5 mins	2 - 3 months	750ml	6	6

### SPOT & SURVEY MARKING

PRODUCT	EXTREMELY FLAMMABLE	IRRITANT	HARMFUL TO THE ENVIRONMENT	PAINT SOLID	EMITS UP TO 60% LESS VOC
FUSION		Not Irritant	Not Harmful	38%	✓
NATIONAL DISTRIBUTION 1 Own Label				21%	✗
NATIONAL DISTRIBUTION 2 Own Label			Not Harmful	19.5%	✗
INDEPENDANT DISTRIBUTOR Own Label			Not Harmful	19.4%	✗
COMPETITOR BRAND 1			Not Harmful	21%	✗
COMPETITOR BRAND 2			Not Harmful	21%	✗



# CONTRACTOR®

## Rapid, cost effective semi-permanent spot & survey marking

CONTRACTOR is the superior spot and survey marking system on the market today, providing the requirements for durability with a clear market leading performance on sustainability and safety.

### FEATURES AND BENEFITS

- ▶ One pass system gives excellent visibility up to 6 months durability
- ▶ Extra Tough 18Bar rated aerosol cans minimises risk of puncture or failure in high temperatures
- ▶ Clog Free formulation and a nozzle system for added reliability
- ▶ Fast drying - touch dry in 5 minutes
- ▶ Can be applied in damp conditions and surface temperatures down to 0c
- ▶ Colour coded range for cable, water, gas & electric company use
- ▶ Suitable for marking surfaces such as asphalt or tarmac, concrete, metals, timber, soil, grass, sand and gravel, artificial and natural stone, brickwork and composites



#### PRODUCT TYPES

General Marking	<input type="checkbox"/>
General Marking	<input type="checkbox"/>
Water	<input type="checkbox"/>
Electricity	<input type="checkbox"/>
Cable	<input type="checkbox"/>
Deletes Existing	<input type="checkbox"/>

#### DESCRIPTION

White	<input type="checkbox"/>
Yellow	<input type="checkbox"/>
Blue	<input type="checkbox"/>
Red	<input type="checkbox"/>
Green	<input type="checkbox"/>
Black	<input type="checkbox"/>

#### PART CODE

43080  
43081  
43082  
43083  
43084  
43085

#### SIZE

750ml  
750ml  
750ml  
750ml  
750ml  
750ml

# FUSION FORMULATION

Responsible Spot and Survey Marking Paints

## WHAT IS FUSION FORMULATION?

Fusion spot and survey marking paints from ROCOL® were developed over 12 months. After comprehensive research, extensive field trials, working with our major corporate customers and the people who use spot marking paints every day, we formulated this professional unique product for the market.

## WORKING WITH OUR CUSTOMERS

Designed and developed with Balfour Beatty in line with their 'ZERO HARM' programme and in conjunction with a host of leading European construction and utility companies, the 'fusion' range is unlike any other spot marking paint currently on the market.

\*Evaluated under EC directive 1999/45/EC

## HEALTH, SAFETY AND THE ENVIRONMENT

Most other spot and survey marking paints on the market may have a significant negative impact either on the environment or with the user.

Most are an irritant to skin and are harmful to the environment or aquatic life.


## ENVIRONMENTAL FEATURES:

- Non - irritant formula\*
- Not harmful to the environment\*
- Not harmful to aquatic life\*
- Up to 90% more paint than similar spot and survey markers
- Effective on damp and 0°C\*\*\*
- Patented clog - free cap

\*\*Duration may vary due to surface conditions, weather, paint thickness and traffic levels.

\*\*\* Applies to Temporary Fusion only

Temporary™ Fusion on dry tarmac

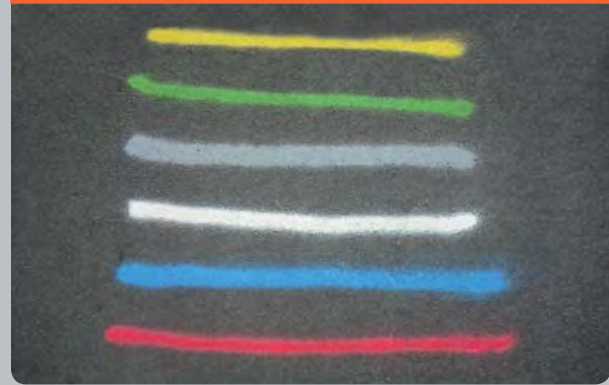

Temporary™ Fusion after being scrubbed with water and a stiff brush



PRODUCT	EXTREMELY FLAMMABLE	IRRITANT	HARMFUL TO THE ENVIRONMENT	PAINT SOLID	EMITS UP TO 60% LESS VOC
FUSION		Not Irritant	Not Harmful	38%	✓
NATIONAL DISTRIBUTION 1 Own Label				21%	✗
NATIONAL DISTRIBUTION 2 Own Label			Not Harmful	19.5%	✗
INDEPENDANT DISTRIBUTOR Own Label			Not Harmful	19.4%	✗
COMPETITOR BRAND 1			Not Harmful	21%	✗
COMPETITOR BRAND 2			Not Harmful	21%	✗



SCAN TO WATCH THE  
**TEMPORARY FUSION**  
 DEMONSTRATION  
 VIDEO OR GO TO  
[www.rocol.com/temporaryfusion](http://www.rocol.com/temporaryfusion)



**CONTRACTOR® FUSION**



**Contractor Fusion is formulated to last between 3-6 months\*\***

**Other Key Features:**

- ▶ Lines required to last 3-6 months\*\*
- ▶ One pass system for bright, durable lines
- ▶ Extra tough 18Bar rated aerosol can
- ▶ Fast Drying - touch dry in 5 minutes
- ▶ Colour coded range for company use
- ▶ Suitable for use on a range of surfaces including: tarmac, asphalt, concrete, grass and soil

43080	White	
43081	Yellow	
43082	Blue	
43083	Red	
43084	Green	

**TEMPORARY™ FUSION**



**Temporary Fusion is formulated to last between 2-3 months\*\***

**Other Key Features:**

- ▶ Lines required to last between 2-3 months\*\*
- ▶ One pass system for bright, durable lines
- ▶ Extra tough 18Bar rated aerosol can
- ▶ Fast Drying - touch dry in 5 minutes
- ▶ Suitable for use on a range of surfaces including: tarmac, asphalt, concrete, grass and soil
- ▶ Ideal for pavement spot marking in areas where permanent paint lines do not want to be left after work has been completed\*\*
- ▶ Avoids claims from local authorities by allowing removal of paint before it becomes classed as graffiti after 6 months

44030	White	
44031	Yellow	
44032	Blue	
44033	Red	
44034	Green	
44035	Grey	

# SLIP PREVENTION

Reducing the Risk of Slips, Trips and Falls

ROCOL® offer the broadest range of anti-slip products available on the market.

Health and Safety Executive figures show that slips, trips and falls cause the most incidents in the workplace and cost the economy up to £645 million\* per year in lost production and healthcare costs. This does not include the costs that individuals can claim for compensation from employers or clients.

\* Source: Health & Safety Executive



## SAFE STEP® Slip Prevention Product Selector Guide

PRODUCT	DOWNTIME	DESIGN LIFE	COVERAGE	PACK SIZE
Safe Step® Coatings	12 hours	Up to 5 years	Up to 20 m <sup>2</sup> Dependant on coating	5L
Safe Step® Tapes, Treads	Minimal	Up to 1 year	Wide range available	5L
Safe Step® Repair & Preparation	Dependant on product	Up to 2 years	Dependant on specification	
MATRIX™ Panels	Minimal	5 years	1150mm x 750mm	1 panel
MATRIX™ Treads	1-2 hours	5 years	280mm x 1200mm	6 panels
Cicol® NT	16 hours	10 + years	Dependant on specification	
ACME® Panels	Minimal	10 + years	Dependant on specification	
ACME® GRP Panels	Minimal	5 years	1.44m x 1.22m	1 panel
Pro-tread™	1-2 hours	15 years	Modular System - Dependant on specification	






## SAFE STEP® FLOOR COATING

Much of the technology employed in the manufacture of SAFE STEP anti-slip products was originally developed for use on the flight decks of Navy aircraft carriers. The coating has been tested to withstand a minimum of 15,000 high impact landings from an aircraft, weighing 32 tonnes and landing at 175 mph.


Today, SAFE STEP high performance anti-slip coatings provide a durable anti-slip surface for use in many applications without the need for regular re-application, and their unique profile gives our coatings a guaranteed level of slip resistance.

### HARD ROLLER

Suitable for the application of SAFE STEP 50, 100, 200 and 500 SF range of anti-slip products.

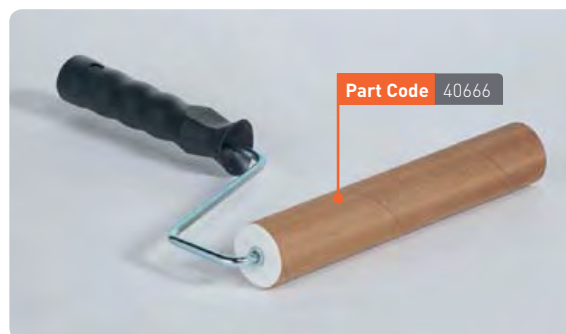


### SAFE STEP 50




For application in large areas of low pedestrian traffic e.g. factory floors, garages and storage areas.

#### Key Features:

- ▶ Coverage: 20m<sup>2</sup> per pack (roller applied)
- ▶ Resin: Chlorinated Rubber / Alkyd Resin
- ▶ Drying Times: 6 hours light traffic / 16 hours heavy traffic

Description	Part Code	Pack
Grey	43070	5L
Tile Red	43071	5L 


### SAFE STEP 100



For application in areas of heavy pedestrian traffic e.g. ramps, steps and work platforms

#### Key Features:

- ▶ Coverage: 3.7m<sup>2</sup> per pack (roller applied)
- ▶ Resin: Styrenated Epoxy Ester
- ▶ Drying Times: 12hours light traffic / 72 hours heavy traffic
- ▶ Resistant to most oils, acids, alkalis and solvents

Description	Part Code	Pack
Grey	43266	5L
Tile Red	43267	5L 
Safety Yellow	43277	5L

## WHY IS SAFE STEP® UNIQUE?

- ▶ Unique peak and trough coating
- ▶ Aluminium oxide for durability
- ▶ Thixotropic formulation guarantees slip resistant profile
- ▶ Rough surface pierces contamination for increased grip


### SAFE STEP PRIMER

Two-pack epoxy primers to seal highly porous surfaces & improve adhesion, coverage of top coat and product performance.



Product	Part Code	Pack
Metal Prime	43265	0.75L
Metal Primer	44087	5L
Non-Metal Primer	43284	0.7L

### SAFE STEP 200




For application in areas of heavy vehicular traffic e.g. fork – lift truck ramps and loading bays

#### Key Features:

- ▶ Coverage: 5m<sup>2</sup> per pack (roller applied)
- ▶ Usable Life: 6 hours
- ▶ Curing Times: 24 hours light traffic / 48 hours heavy traffic
- ▶ Resistant to most oils, acids, alkalis, grease, oil, salt water and solvents

Description	Part Code	Pack
Grey	43320	5L
Tile Red	43321	5L
Safety Yellow	43322	5L

### SAFE STEP 500SF



For application in solvent sensitive areas e.g. breweries, food processing facilities, hospitals and confined areas

#### Key Features:

- ▶ Coverage: 2.7m<sup>2</sup> - 4.7m<sup>2</sup> per pack (roller applied)
- ▶ Usable Life: 30-40 minutes @ 21°C
- ▶ Curing Times: 24 hours light traffic / 48 hours heavy traffic

Description	Part Code	Pack
Grey	43323	5L
Tile Red	43324	5L



## SAFE STEP® TREADS & TAPES

Providing an economical and immediate solution to slip problems




### FEATURES & BENEFITS

- ▶ Extremely durable, mineral coated general purpose anti-slip tape.
- ▶ Self-adhesive
- ▶ Water, oil and chemical resistant
- ▶ For internal and external use

#### EDGE SEALER

For sealing edges around tapes, tiles and treads

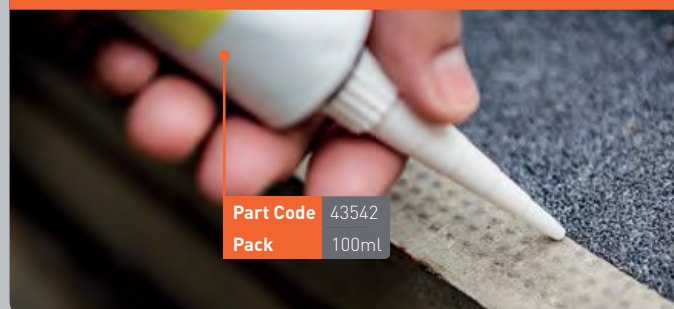

Part Code 43542  
Pack 100ml

#### STRONG BOND

For priming porous surfaces prior to application of tapes, tiles and treads

Part Code 43541  
Pack 500ml



### STANDARD TAPE



Ideal for doorways, entrances, exercise equipment, ladders, machinery platforms, porches, ramps, scaffolding, steps, walkways and ramps.

Description	Part Code	Pack
25mm x 18.25m	43530	Roll
50mm x 18.25m	43531	Roll
100mm x 18.25m	43532	Roll
150mm x 18.25m	43533	Roll

### HIGH-VIS TAPE



For general use and where visibility is of particular importance, e.g. basement stairways

Description	Part Code	Pack
50mm x 18.25m	43540	Roll

### HAZARD TAPE



Contrasting colours call attention to hazardous machinery, work areas or stairs.

Description	Part Code	Pack
50mm x 18.25m	43547	Roll

### STANDARD TREADS



Ideal for stairs and doorways

Description	Part Code	Pack
150mm x 600mm	43534	50
150mm x 600mm	43535	10



## SAFE STEP® ANTI-SLIP SPRAY



### FEATURES & BENEFITS

- ▶ A quick-fix anti-slip coating, ideal for small areas
- ▶ Transparent
- ▶ Suitable for interior and exterior use
- ▶ Suitable for pedestrian traffic
- ▶ Durability approximately 6 months, dependent upon application
- ▶ Coverage 1.5-2m<sup>2</sup> per 400ml aerosol
- ▶ Application temperature between 5-30°C



**PART CODE**

**45000**

**SIZE**

**400ml**

# SAFE STEP<sup>®</sup> MATRIX<sup>™</sup>

Immediate anti-slip solution

## TYPICAL APPLICATIONS

- ▶ Slippery surfaces
- ▶ Kitchens
- ▶ Ramps
- ▶ Workstations
- ▶ Walkways
- ▶ Stairs and steps
- ▶ Food production areas
- ▶ Open mesh catwalks
- ▶ Chequer plate



The unique, patented grid design of SAFE STEP MATRIX enables both panels and treads to be cut quickly and easily on site to suit any particular layout.



## ANTI-MICROBIAL FEATURES:

- ▶ Effective over a wide spectrum of bacteria
- ▶ Tests based on AATCC 100 method using Salmonella typhimurium, Listeria monocytogenes, staphylococcus aureus and Escherichia coli.
- ▶ Will not wash off
- ▶ Independently tested






“THE PROJECT WAS COMPLETED ON TIME  
AND THIS WAS LARGELY DUE TO THE EASE  
OF APPLICATION OF THE PANELS”

CHRIS CLIFFORD, SECTION ENGINEER AT BAM NUTTALL



### SAFE STEP® MATRIX™

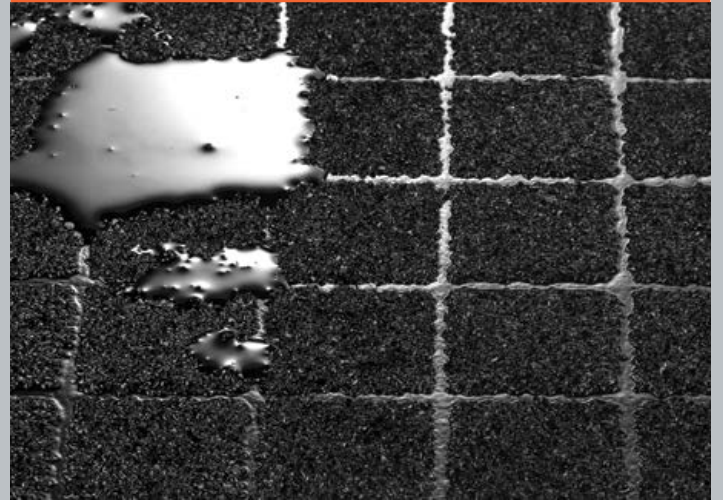

SAFE STEP MATRIX is available as flat panels for flooring or treads for steps. It is also available in two colours, black and yellow

Description	Colour	Part Code
1150mm x 750mm	Black	43300
1150mm x 750mm	Yellow	43302
280mm x 1200mm	Black	43306
280mm x 1200mm	Yellow	43308

### SAFE STEP® GRP PANELS

SAFE STEP GRP panels available in black.

Part Code	Size (WxL)
43358	1.2m x 2.4m 📞

# CICOL® NT

The UK's most specified, premier anti-slip coating

The CICOL NT system has an unrivalled track record over the past 35 year in skid and slip prevention. It is a tar free combined anti-skid wearing course and waterproof membrane and is the first choice solution for steel, concrete and aluminium substrates when a light weight anti-skid surfacing is essential.

Used consistently across the UK, from the Humber Bridge to Dover Harbour and by customers such as Coca-Cola and the British Army.

## Features and Benefits

- ▶ Light weight - Only 10-20kgs per square metre depending upon specification
- ▶ A range of dressing aggregates is available to meet the required skid resistance values
- ▶ Completely waterproof, no separate membrane or anti-corrosion treatment needed
- ▶ Excellent chemical resistance against fuels, oils and de-icers.
- ▶ Design life in excess of 20 years and fully documented case histories

The use of CICOL NT is not confined to the above structures where its light weight properties are a distinct advantage. There are many instances where its other properties make it an ideal choice of surfacing.

A range of decorative aggregates can be used in conjunction with CICOL NT. Use of these aggregates have a shorter design life and should only be considered for pedestrian areas.

Note: CICOL NT has superseded the original CICOL ET version, in line with new Health and Safety regulation.

### Applied at Dover Harbour



### Light weight for Tower Bridge bascules



DESCRIPTION	PART CODE	SIZE
CICOL NT Slurry Kit	44330	25KG
CICOL NT Slurry Kit	44334	50KG
CICOL NT Slurry Kit	44337	100KG
CICOL NT Slurry Kit	44340	1000KG
CICOL NT Concrete Primer	43203	4.5L
CICOL NT Concrete Primer	43204	12.5L





## ACME® PANELS

The UK's most specified load bearing and overlay engineered anti-slip decking system

ACME Panels are made-to-order anti-slip decking systems, engineered to fit a wide range of applications; from structures around machinery to complex bridge and platform constructions.

The success of the decking panel concept is that the resin encapsulated are pre-manufactured to BS EN ISO 9001 quality standards and then installed on site as a finished product. This ensures minimum downtime even during the most adverse weather conditions.

Used on consistently across the UK from Europe's busiest railway station Clapham Junction to Tower Bridge and by customers such as English heritage and British Aerospace.

ACME Panels have been successfully installed within the automotive, aerospace, rail and power generation industries, as well as in brewers, hospitals, universities and schools.

### Features and Benefits

- ▶ A durable, anti-slip solution for pedestrian or vehicular traffic
- ▶ Design life in excess of 15 years limits the frequency of refurbishment work saving considerable cost long term
- ▶ Custom - made to exact project requirements
- ▶ Available in 3 colours - yellow, grey & black
- ▶ Impact resistant, chamfered edge for increased safety SRA/DDA compliant with a choice of yellow or white sightlines
- ▶ Chemical resistant
- ▶ Fully documented history

### ACME FIRE RESISTANT PANELS

Reducing the risk of slips, trips and fire hazards

- | ▶ RAILWAY            | ▶ INDUSTRY         | ▶ STRUCTURES       |
|----------------------|--------------------|--------------------|
| Platforms            | Suspended flooring | Foot/swing bridges |
| Switch points        | Mezzanine          | Gantries           |
| Track crossings      | Staircases & Ramps | RoRo's & Pontoons  |
| Under run protection |                    |                    |
- ▶ Compliant with reaction to fire standard EN13501-1:2007 + A1:2009, achieving BFL-S1.
  - ▶ Available in a range of thicknesses, colours and textures. Suitable for varied load bearing ratings

### Fire Resistant Panel



### Safe anti-slip decking for station platforms



### Used on Clapham Junction railway station



### Hi-Vis point board




## PRO-TREAD™

Provides a safe, anti-slip surface for areas of heavy-duty pedestrian traffic



### PRO-TREAD TREAD

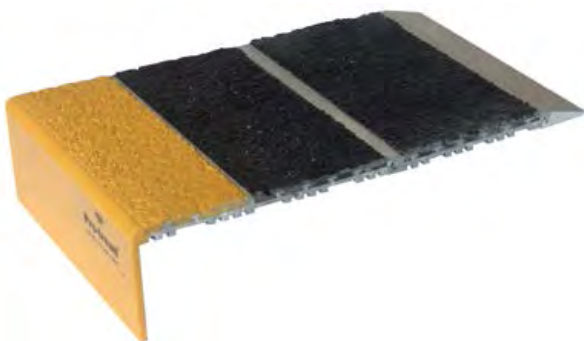

## FEATURES & BENEFITS

- ▶ Made from extruded aluminium and a solvent free infill
- ▶ Quick and simple to install ensuring minimal disruption
- ▶ Suitable for both interior and exterior applications
- ▶ Slip resistant surface in both wet and dry conditions
- ▶ Withstands high volumes of traffic
- ▶ Design life in excess of 15 years
- ▶ Impact resistant stair nosing giving product longevity
- ▶ Colour co-ordinated, DDA compliant, sightline and nosing for maximum visibility
- ▶ SRA compliant
- ▶ Can be installed over almost any material including concrete, metal, wood, tile, marble and stone
- ▶ Available in 4 colour combinations - yellow, grey, black and white

DESCRIPTION	PART CODE	SIZE
PRO-TREAD Nosing	40806	150mm
PRO-TREAD Tread	40810	50mm
PRO-TREAD Tread	40812	150mm
Chamfer	40820	30mm



# SAFE STEP® REPAIR

## Asphalt Repair Compound

Durable and long lasting cold lay bitumen macadam developed specifically for :

- ▶ The repair of holes in macadam (asphalt)
- ▶ Other paved areas e.g. car parks, walkways, cycle paths etc.  
It can be laid in all weather conditions and can be driven over immediately after application.

### FEATURES AND BENEFITS

- ▶ Ready for heavy traffic immediately after laying
- ▶ Can be laid in all weather conditions
- ▶ Resistant to oil
- ▶ Quick and easy to use. Can be carried to site in easy to handle containers
- ▶ Coverage: 0.75m<sup>2</sup> per 25kg pack (10mm thickness)



**PART CODE**

**42031**

**SIZE**

**25KG**

**Concrete Repair Compound**



**KEY FEATURES & BENEFITS:**

- ▶ Rapid Setting and ready for heavy use in 4 hours
- ▶ Highly resistant to impact and scuffing, abrasion, water, steam, oils and most common chemicals and solvents.
- ▶ One part product - simply add water prior to use
- ▶ Yield: 12.5 litres per 25kg unit
- ▶ For internal and external use
- ▶ Ideal for medium to large repairs

PART CODE	SIZE
42025	25KG

**Heavy Duty Epoxy Repair Compound**



**KEY FEATURES & BENEFITS:**

- ▶ Full mechanical performance in less than 24 hrs
- ▶ Does not shrink or dust
- ▶ Chemical resistant compound
- ▶ For internal and external applications
- ▶ Coverage: 0.5 m<sup>2</sup> per 5kg pack (5mm thickness)\*

\* This figure makes no allowance for substrate profile, uneven application or losses in containers.

PART CODE	SIZE
42036	5KG



# PACERS®

Reduce heavy traffic to 5mph

The PACERS system is recognised internationally as one of the most effective methods of speed reduction and has been successfully utilised for over 25 years.

Manufactured from hard tough, high impact virgin rubber, our PACERS speed bumps are ideal for areas of intense, heavy traffic such as manufacturing sites, large retail parks and hospitals.

## FEATURES & BENEFITS


- ▶ Optimised hardness for focus and compression by all types of vehicles up to 44 tons
- ▶ Guaranteed durability - typical design life in excess of 10 years
- ▶ Modular construction for easy installation and relocation
- ▶ Supports up to 44 tons when fitted to specifications
- ▶ Integrated red and green cats eyes which provide maximum visibility for the ramps at night and allow night time directional traffic flow
- ▶ Grooved surface assisting traction in wet and icy conditions
- ▶ Opening for steel pole to align the modules, which can be substituted for cables and hoses in temporary applications
- ▶ Expandaplug fixing system for use in concrete and asphalt

Description	Part Code	SIZE (DxWxH)
PACERS (1 pair)	40930	410 x 250 x 68mm
PACERS END CAPS (1 pair)	40931	
Expandaplugs (pack of 4)	40934	

### SUPPORTS UP TO 44 TONS



### PACERS

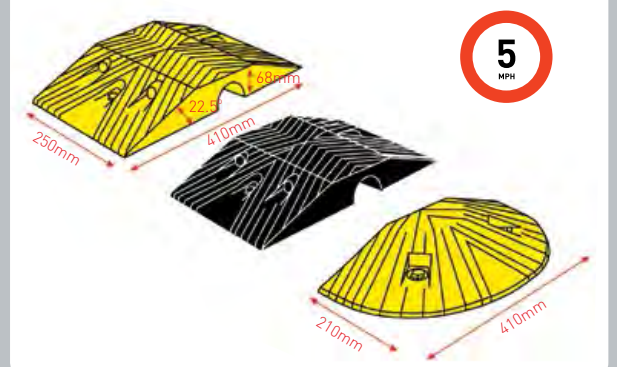

# LINE MARKING MADE EASY

## IT PERFORMS BRILLIANTLY

- ▶ Twice as durable as any other paint on the market
- ▶ UV-stable
- ▶ Chemically-resistant
- ▶ Super-tough traffic-grade

## IT'S QUICK AND EASY TO USE

- ▶ Touch dry in 10 minutes
- ▶ Ready for action in 20 minutes
- ▶ Intuitive EASYLINE Applicator
- ▶ Professional quality lines

## IT'S EXCELLENT VALUE FOR MONEY

- ▶ 100% more paint than most other systems
- ▶ Up to 100m of a 50mm wide line
- ▶ Lasts twice as long as nearest competitor
- ▶ No need for expensive contractors

## IT'S SAFE


- ▶ Conforms to ISO standards
- ▶ Lowest VOC system on the UK market
- ▶ Environmentally safe
- ▶ Not toxic, corrosive, harmful or classed as an irritant



IF YOU NEED  
ANY MORE  
INFORMATION  
PLEASE CONTACT:

**+44 (0)113 232 2653**  
**[www.rocol.com](http://www.rocol.com)**



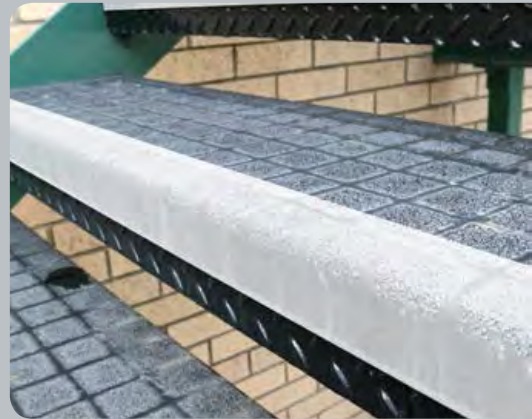

**ROCOL**

ROCOL® House, Swillington, Leeds LS26 8BS

T +44 (0) 113 232 2600

F +44 (0) 113 232 2740

E [customer-service@rocol.com](mailto:customer-service@rocol.com)

ROCOL® and Rocolcare® are trademarks of ITW inc

[www.rocol.com](http://www.rocol.com)

ROCOL A division of **ITW** Ltd



FM 12448



EMS 67596



OHS 78173

